


Roundsling Assembly RR-276

Product information

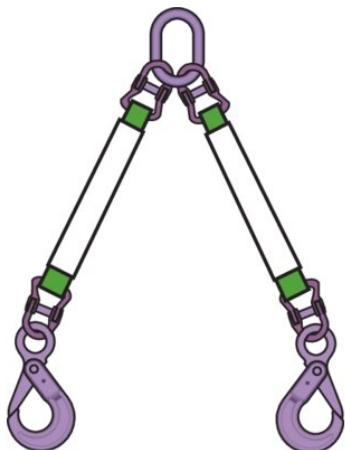

Design: Roundsling covered with extra protection sleeve and provided with strengthen eye in each end, assembled as a tool in combination with lifting details in grade 8. Max manufacturing length 20 m.

Stretch with working load: 2-3%.

Length tolerance: Nominal length $\pm 2\%$.

Safety factor: Forge 4:1 and round sling 7:1

[... Read more](#)

Material: Polyester. Resistant to most acids but not strong alkalizes.

Marking: According to standard, The slings are provided with a label with manufacturer's symbol, working load limit (WLL) and CE marking.

Temperature range: app. -40° - $+100^{\circ}\text{C}$.

Standard: EN 1492-2

Grade: 10

Roundsling Assembly RR-276

Technical data

Part code	WLL ton	Colour
RR27601	1.4	Violet
RR27602	2.8	Green
RR27603	4.2	Yellow
RR27604	5.6	Grey
RR27605	7	Red
RR27606	8.4	Brown
RR27608	11.2	Blue
RR27610	14	Orange