


## Roundsling Assembly RR-476

---

### Product information

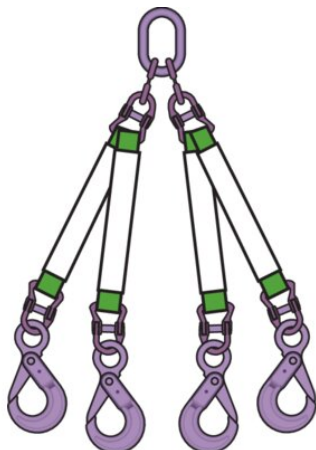

**Design:** Roundsling covered with extra protection sleeve and provided with strengthen eye in each end, assembled as tool in combination with lifting details in grade 8. Max manufacturing length 20 m.

**Stretch with working load:** 2-3%.

**Length tolerance:** Nominal length  $\pm 2\%$ .

**Safety factor:** Forge 4:1 and round sling 7:1.

[... Read more](#)

---

**Material:** Polyester. Resistant to most acids but not strong alkalizes.

**Marking:** According to standard, The slings are provided with a label with manufacturer's symbol, working load limit (WLL) and CE marking.

**Temperature range:** app.  $-40^{\circ}$  -  $+100^{\circ}\text{C}$ .

**Standard:** EN 1492-2

**Grade:** 10

## Roundsling Assembly RR-476

### Technical data

Part code	WLL ton	Colour
RR47601	2.1	Violet
RR47602	4.2	Green
RR47603	6.3	Yellow
RR47604	8.4	Grey
RR47605	10.5	Red
RR47606	12.6	Brown
RR47608	16.8	Blue
RR47610	21	Orange