
MENNENS | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope 6x19S-IWRC

Product information

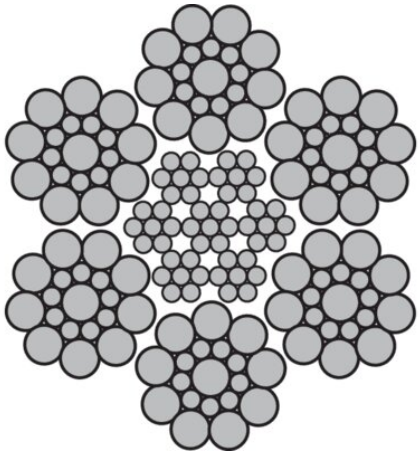

Typical applications: Skidding winches.
Standard: EN 12385-4.

Design: Ordinary right hand lay.

Fill factor: 0,57
ISO 4309 Rope Category No: All Diameters RCN.02

... *Read more*

Rope construction: 6x19S-IWRC
Marking: According to standard
Finish: Galvanized.
Standard: EN 12385-4

Fill factor: 0.57
RCN: 02

Mennens Belgium
sales@mennensbelgium.be
+32 (0)3 253 23 23

© November 2026 - All Rights Reserved

MENNENS | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope 6x19S-IWRC

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
101100604270229	6	1,960	Galvanized	sZ	25.1	16.2	SupplierStandard	14.4
101100804270229	8	1,960	Galvanized	sZ	44.7	28.7	SupplierStandard	25.6
101101004270229	10	1,960	Galvanized	sZ	69.8	44.9	SupplierStandard	40
101101204270229	12	1,960	Galvanized	sZ	100	64.7	SupplierStandard	57.6
101101404270229	14	1,960	Galvanized	sZ	137	88	SupplierStandard	78.4

Mennens Belgium
sales@mennensbelgium.be
+32 (0)3 253 23 23

© November 2026 - All Rights Reserved