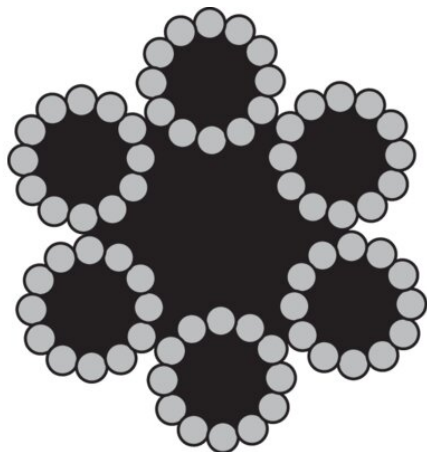


## Steel Wire Rope 6x12-7FC

---

### Product information

SZ G

[... Read more](#)

**Rope construction:** 6x12-7FC

**Fill factor:** 0.30

## Steel Wire Rope 6x12-7FC

### Technical data

| Part code     | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication | Weight<br>kg/100m |
|---------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|-------------|-------------------|
| 01.G10072030E | 3                   | 1,770                                 | Galvanized | sZ       | 3.33                      | 2.09                          | Dry         | 2.1               |
| 01.G10072040E | 4                   | 1,770                                 | Galvanized | sZ       | 5.92                      | 3.71                          | Dry         | 3.7               |
| 01.G10072050E | 5                   | 1,770                                 | Galvanized | sZ       | 9.25                      | 5.8                           | Dry         | 5.8               |
| 01.G10072060E | 6                   | 1,770                                 | Galvanized | sZ       | 13.3                      | 8.35                          | Dry         | 8.3               |
| 01.G10072070E | 7                   | 1,770                                 | Galvanized | sZ       | 18.1                      | 11.4                          | Dry         | 11                |
| 01.G10072080E | 8                   | 1,770                                 | Galvanized | sZ       | 23.7                      | 14.8                          | Dry         | 15                |
| 01.G10072100E | 10                  | 1,770                                 | Galvanized | sZ       | 37                        | 23.2                          | Dry         | 23                |
| 01.G10072120E | 12                  | 1,770                                 | Galvanized | sZ       | 53.3                      | 33.4                          | Dry         | 33                |