
MENNENS | Lifting Solutions Group
Axel Johnson International

Housings RC4 and RC7 Click Ductor

Product information

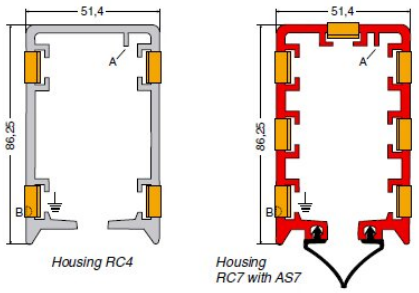

General:
In the PVC housing RC4 4 copper conductors are provided.
The PVC housing RC7 has 7 channels in which 4, 5 or 7 conductors, upon demand, are positioned. Installation is effected by means of simply clicking!
An anti-reverse rib (A) on top of the housing prevents cross phasing, incorrect placement of a collector trolley in the conductor system. A continuous yellow marking (B) on one side of the housing simplifies correct mounting of the system.The PVC-housing is self-extinguishing.
The housing RC7 can be provided with flexible rubber strips. As such penetration of dust and moisture can be minimised as a result of which an optimum of reliability is ensured

Housings:
Type RC4 with 4 copper conductors.
Color housing: grey.
Temperature range: -20 °C up to +50 °C.
Suitable for indoor applications.

Type RC7-4 with 4 copper conductors.
Housing suitable for AS7 sealing
strips (see picture right).
Color housing: signal red.
Temperature range: -20 °C up to +50 °C.
Suitable for indoor and outdoor applications.

Type RC7-5 Housing equal to RC7-4, however with 5 copper conductors.
Temperature range: -20 °C up to +50 °C. Suitable for indoor
and outdoor applications.
Only available on special request.

... *Read more*

Mennens Belgium
sales@mennensbelgium.be
+32 (0)3 253 23 23

© November 2026 - All Rights Reserved

Housings RC4 and RC7 Click Ductor

Technical data

Part code	Description	Max track length (m) **)
60972101065B0000	Rail section grey RC4-4-50/3M, 4 poles, 50 A	200
60972101265B0000	Rail section grey RC4-4-80/3M, 4 poles, 80 A	360
60972110490	Rail section grey RC4-4-110/3M, 4 poles, 110A	500
60972110500	Rail section grey RC4-4-125/3M, 4 poles, 125A	800
60972110510	Rail section grey RC4-3-160/1-125/3M, 4 poles, 160A	800
60972110520	Rail section grey RC4-3-200/1-125/3M, 4 poles, 200A	800
60972101075B0000	Rail section grey RC4-4-50/4M, 4 poles, 50 A	200
60972101275B0000	Rail section grey RC4-4-80/4M, 4 poles, 80 A	360
60972110370	Rail section grey RC4-4-110/4M, 4 poles, 110A	500
60972110380	Rail section grey RC4-4-125/4M, 4 poles, 125A,	800
60972110390	Rail section grey RC4-3-160/1-125/4M, 4 poles, 160A	800
60972110400	Rail section grey RC4-3-200/1-125/4M, 4 poles, 200A	800
60972103065B0000	Rail section red RC7-4-50/3M, 4 poles, 50 A	200
60972103365B0000	Rail section red RC7-4-80/3M, 4 poles, 80 A	360
60972110530	Rail section red RC7-4-110/3M, 4 poles, 110A	500
60972110540	Rail section red RC7-4-125/3M, 4 poles, 125A	800
60972110550	Rail section red RC7-3-160/1-125/3M, 4 poles, 160A	800
60972110560	Rail section red RC7-3-200/1-125/3M, 4 poles, 200A	800
60972103155B0000	Rail section red RC7-7-50/3M, 7 poles, 50 A	200
60972103455B0000	Rail section red RC7-7-80/3M, 7 poles, 80 A	360
60972110570	Rail section red RC7-7-110/3M, 7 poles, 110A	500
60972110580	Rail section red RC7-7-125/3M, 7 poles, 125A	800
60972110590	Rail section red RC7-7-160/3M, 7 poles, 160A	800
60972110600	Rail section red RC7-7-200/3M, 7 poles, 200A	800
60972103075B0000	Rail section red RC7-4-50/4M, 4 poles, 50 A	200
60972103375B0000	Rail section red RC7-4-80/4M, 4 poles, 80 A	360
60972110410	Rail section red RC7-4-110/4M, 4 poles, 110A	500
60972110420	Rail section red RC7-4-125/4M, 4 poles, 125A	800
60972110430	Rail section red RC7-3-160/1-125/4M, 4 poles, 160A	800
60972110440	Rail section red RC7-3-200/1-125/4M, 4 poles, 200A	800
60972103165B0000	Rail section red RC7-7-50/4M, 7 poles, 50 A	200
60972103465B0000	Rail section red RC7-7-80/4M, 7 poles, 80 A	360

Mennens Belgium
sales@mennensbelgium.be
+32 (0)3 253 23 23

© November 2026 - All Rights Reserved

Housings RC4 and RC7 Click Ductor

Technical data

Part code	Description	Max track length (m) **)
60972110450	Rail section red RC7-7-110/4M, 7 poles, 110A	500
60972110460	Rail section red RC7-7-125/4M, 7 poles, 125A	800
60972110470	Rail section red RC7-7-160/4M, 7 poles, 160A	800
60972110480	Rail section red RC7-7-200/4M, 7 poles, 200A	800

Mennens Belgium
sales@mennensbelgium.be
+32 (0)3 253 23 23

© November 2026 - All Rights Reserved