


## Kiswire Steel Wire Rope 19x7 | semi-rotation resistant

### Product information

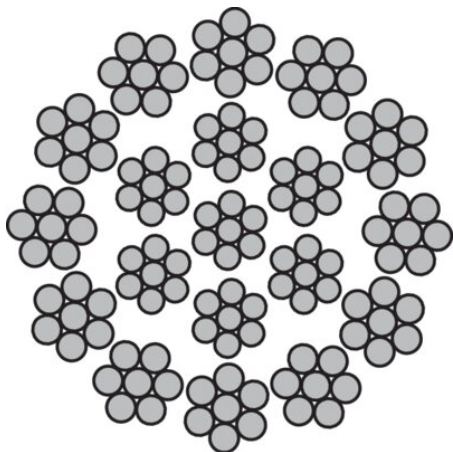

Semi-rotation resistant galvanized multistrand lifting cable from the renowned steel wire rope manufacturer Kiswire. High- and consistent quality guaranteed!

**Applications:** Suitable for, for example, cranes, electric hoists, winches and other applications where a semi-rotation resistant construction is enough.

**Laying method:** RHOL Right-Hand-Ordinary-Lay, sZ (standard), Lang's Lay (zZ) on request

**ISO 4309 Cable Category No.:** all diameters RCN.23-1

[... Read more](#)

**Rope construction:** 19x7

**Marking:** According to standard

**Standard:** EN 12385-4

**RCN:** 23-1

## Kiswire Steel Wire Rope 19x7 | semi-rotation resistant

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102100604270382	6	1,960	Galvanized	sZ	23.1	A-2	15.1
102100704270382	7	1,960	Galvanized	sZ	31.5	A-2	20.6
102100804270382	8	1,960	Galvanized	sZ	41.1	A-2	26.9
102100904270382	9	1,960	Galvanized	sZ	52.1	A-2	34.1
102101004270382	10	1,960	Galvanized	sZ	64.3	A-2	42.1
102101104270382	11	1,960	Galvanized	sZ	77.8	A-2	51
102101204270382	12	1,960	Galvanized	sZ	92.6	A-2	60.8
102101304270382	13	1,960	Galvanized	sZ	109	A-2	71.2
102101404270382	14	1,960	Galvanized	sZ	126	A-2	81.9
102101604270382	16	1,960	Galvanized	sZ	165	A-2	107
102101804270382	18	1,960	Galvanized	sZ	217	A-2	137
102102004270382	20	1,960	Galvanized	sZ	273	A-2	170
102102204270382	22	1,960	Galvanized	sZ	311	A-2	195