MENNENS | Lifting Solutions Group
Axel Johnson International

Vertical Lifting Clamp IP10S

Product information



The Crosby IP10S is a vertical lifting clamp designed for lifting, turning and transferring stainless steel plates. Its fixed hoisting eye, locking mechanism and 180° turning range support controlled plate handling in industrial lifting operations. Available with working load limits from 0.5 to 9 tonnes, depending on the selected size.

Best used for:

- Vertical lifting and transferring stainless steel plates in workshops and industrial facilities.
- Turning stainless steel plates during fabrication, processing and material handling.

Product benefits:

- 180° turning range supports plate positioning and transfer operations.
- Lock-open and lock-closed mechanism enables pretensioning and controlled release.
- Welded alloy steel body combines structural strength with compact dimensions.
- Individual proof testing at twice the WLL provides documented load verification.
- Individual serialisation and supplied test certificate support inspection and traceability.

... *Read more*

Material: Alloy Steel. Pivot & cam stainless steel
Marking: According to standard, CE-mark, WLL, Logo, Type, Jaw opening, Serial number, Proof load test date
Temperature range: -40°C (-40°F) up to +100°C (+212°F)
Standard: EN 13155
Warning: A minimum load of 10% of the WLL is required.


Mennens Belgium
sales@mennensbelgium.be
+32 (0)3 253 23 23

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Vertical Lifting Clamp IP10S

Blueprint

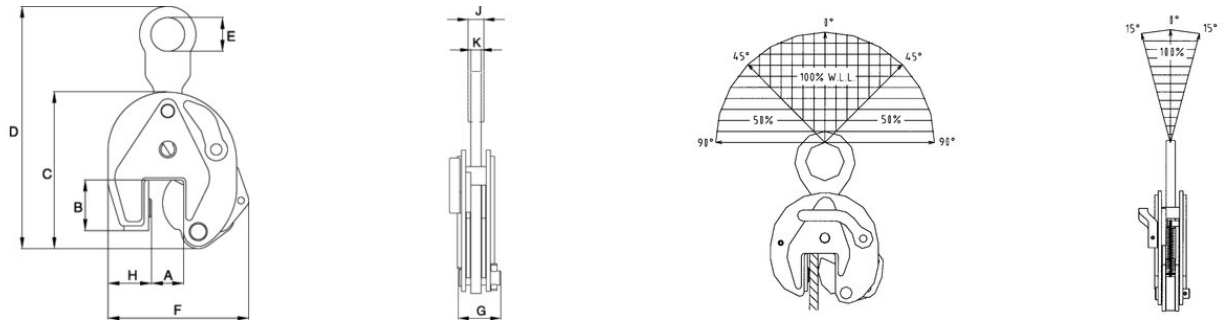

Technical data

Part code	WLL ton	Jaw width mm	Model	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	J mm	K mm	Weight kg
502100050160370	0.5	0-16	0.5-IP10S	0-16	44	130	203	40	115	42	28	11	11	1.8
502100100200370	1	0-20	1-IP10S	0-20	45	139	212	40	127	42	38	11	11	2.2
502100200350370	2	0-35	2-IP10S	0-35	78	201	330	70	188	64	55	16	16	7.6
502100300400370	3	0-40	3-IP10S	0-40	100	253	434	75	222	78	60	20	20	13.8
502100450400370	4.5	0-40	4.5-IP10S	0-40	100	253	434	75	227	82	65	20	20	15
502100600500370	6	0-50	6-IP10S	0-50	126	302	517	80	292	84	95	20	20	23.5
502100900500370	9	0-50	9-IP10S	0-50	126	325	544	80	310	94	104	25	25	27.5
502101200540370	12	0-54	12-IP10S	0-54	-	-	-	-	-	-	-	-	-	49

Mennens Belgium
sales@mennensbelgium.be
+32 (0)3 253 23 23

© November 2026 - All Rights Reserved