
MENNENS | Lifting Solutions Group
Axel Johnson International

8x19W+IWRC

Product information

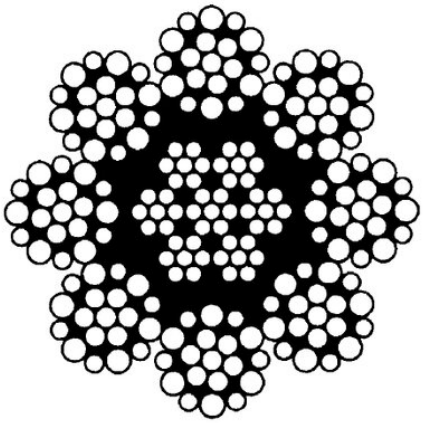

General: Standard 8-strand construction

Minimum breaking force factor: 0.356
Nominal rope length mass factor: 0.407

... *Read more*

Finish: Standard galvanized but alos available ungalvanized

Mennens Belgium
sales@mennensbelgium.be
+32 (0)3 253 23 23

© November 2026 - All Rights Reserved

8x19W+IWRC

Dia. (mm)	MBF 1770N/mm² (kN)	MBF 1960N/mm² (kN)	Weight (kg/100m)
8	40.3	44.7	26
9	51	56.5	33
10	63	69.8	40.7
11	76.2	84.4	49.2
12	90.7	100	58.6
13	106	118	68.8
14	124	137	79.8
16	161	179	104
18	204	226	132
20	252	279	163
22	305	338	197
24	363	402	234
26	426	472	275
28	494	547	319
32	645	715	417
36	817	904	527
40	1010	1120	651
44	1220	1350	788
48	1450	1610	938
52	1700	1890	1100
56	1980	2190	1280
60	2270	2510	1470

Mennens Belgium
sales@mennensbelgium.be
+32 (0)3 253 23 23

© November 2026 - All Rights Reserved