


## LT24K Rotation Resistant Rope

### Product information

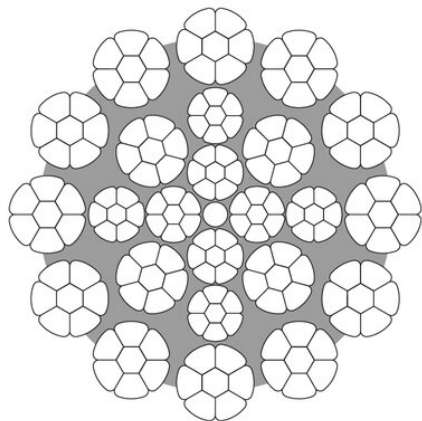

**General:** Recommended for intensive use and severe hoist applications where rotation resistance property is required like e.g. tower cranes.  
For lifting applications with no less than 2 falls.

- dia. 7,2 - 20mm: construction 24xk7 - average fill factor 0,683
- dia. 21-48mm: construction 24xk17 - average fill factor 0,694
- tolerance on diameter (EN; +0% +5%)
- temperature range of use -50°C to +100°C
- temperature range of use for option PPI -50°C to +80°C
- **option PPI** - only available for diameter from 13mm
- available in Lang's Lay
- available in right hand and left hand

... [Read more](#)