


LT17 / 18

Product information

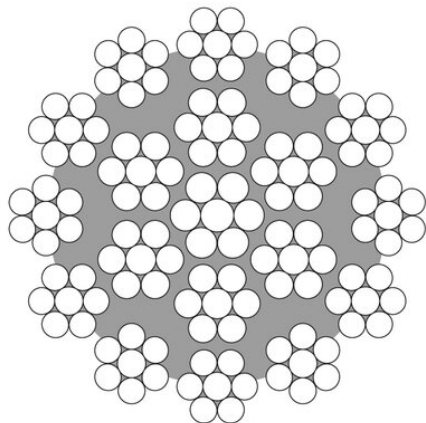

General: All lifting applications when MBL is not critical, and when rotation resistant properties only are required. Can never be used with a single fall.

- dia. 7-19mm: construction 18x7 - average fill factor 0,624
- tolerance on diameter (EN; +0% +5%)
- temperature range of use -50°C to +100°C
- available in Ordinary Lay & Lang's Lay
- available in right hand and left hand
- a swivel may be used subject to the recommendations of the rope manufacturer and/or approval of a competent person.

... [Read more](#)
