
MENNENS | Lifting Solutions Group
Axel Johnson International

Chain WOX Stainless Pewag - Short Link

Product information

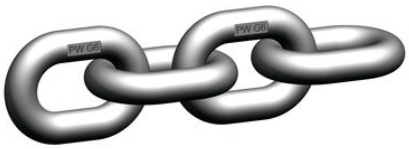

Stainless steel lifting chain, electrically welded and stamped, guaranteed compatible with Connex CWI connectors.

Standard: Similar DIN 5687-1

The WOX chain is particularly suited for use in water and wastewater applications. It can also be used in connection with chemicals and food products; however, restrictions will apply.

... *Read more*

Material: 1.4404 (AISI 316L).
Marking: According to standard
Finish: Brightly polished.
Standard: EN 818-2

Safety factor: 4:1
Grade: 6


Mennens Belgium
sales@mennensbelgium.be
+32 (0)3 253 23 23

© November 2026 - All Rights Reserved

MENNENS | Lifting Solutions Group
Axel Johnson International

Chain WOX Stainless Pewag - Short Link

Blueprint



Technical data

Part code	Chain diameter mm	WLL ton	Min. breaking force kN	Model	b1 min. mm	b2 max. mm	dn mm	t mm	Weight kg/m
202100400000010	4	0.4	16	WOX 4-6	5.8	14.8	4	12	0.4
202100500000010	5	0.63	25	WOX 5-6	7.5	18.5	5	15.1	0.61
202100600000010	6	0.9	37.5	WOX 6-6	8	21.5	6	18	0.88
202100700000010	7	1.25	50	WOX 7-6	9.5	25.2	7	21	1.19
202100800000010	8	1.6	63	WOX 8-6	10.8	28.6	8	24	1.53
202101000000010	10	2.5	100	WOX 10-6	13.5	36	10	30	2.4
202101300000010	13	4.25	170	WOX 13-6	17.5	46.8	13	39	4.05
202101600000010	16	6.3	250	WOX 16-6	21.5	57.6	16	48	6
202102000000010	20	8	314	WOX 20-5	27	72	20	60	9.29
202102600000010	26	12	471	WOX 26-4+	35	93.6	26	78	16.2

Mennens Belgium
sales@mennensbelgium.be
+32 (0)3 253 23 23

© November 2026 - All Rights Reserved