

## Winner 200 Chain Pewag


---

### Product information

Round steel chains for use in lifting or lashing chains.

... [Read more](#)

---

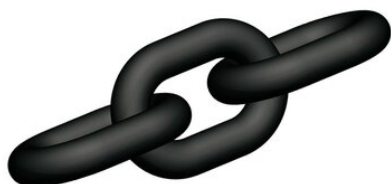

**Material:** High duty chain.

**Marking:** According to standard, Each chain link is marked with 10 for grade 10 and the chain is marked pewag 10 (PWA 100).

**Temperature range:** -40°C up to +200°C.

**Finish:** Blasted, clear painted.


**Standard:** EN 818-2

**Safety factor:** 4:1

**Grade:** 10

## Winner 200 Chain Pewag

### Blueprint



### Technical data

Part code	Chain diameter mm	WLL ton	Min. breaking force kN	dn mm	t mm	b1 mm	b2 mm	Weight kg/m
11.653959	6	1.4	56.5	6	18	8.7	21.6	0.96
11.653973	7	1.9	77	7	21	9.5	25.2	1.2
11.653975	8	2.5	101	8	24	10.9	28.8	1.57
11.653976	10	4	157	10	30	13.5	37	2.46
11.653986	13	6.7	265	13	39	17.5	46.8	4.18
11.653988	16	10	402	16	48	21.5	57.6	6.28
11.653989	19	14	567	19	57	26.6	69.4	8.92
11.654043	22	19	760	22	66	29.5	79.2	11.88
11.6572801	26	26.5	1,006	26	78	35	94	16.18
11.6514245	32	40	1,610	32	96	43.2	115	24.1