


Oversize Clevis Master Pewag Set LXKW 2

Product information

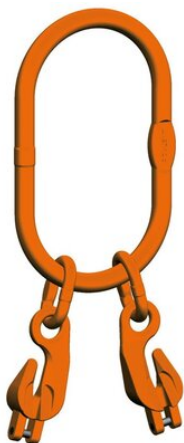

II-leg chain slings in the assembled system are created easily and quickly using this oversized clevis master set, as the chain may be attached directly to the captive coupling of the shortening element, which eliminates the need for an additional connecting element. Assembly and disassembly of the system by a competent person is easy and quick, without the need for special tools.

The hook functions both as a connecting link and a shortening element and the master link is suitable for crane hooks up to no. 25 according to DIN 15401 and up to no. 32 according to DIN 15402. Due to its large master ring, it is frequently used on mobile cranes.

[... Read more](#)

Material: High duty grade 10.

Marking: According to standard, CE-marked, Pewag or PW, winner or 10, H16, batch code and type.

Temperature range: -40°C up to +380°C.

Finish: Orange powder coated.


Standard: EN 818-4

Safety factor: 4:1

Grade: 10

Oversize Clevis Master Pewag Set LXKW 2

Blueprint



Technical data

| Part code | Code | WLL ton | EWL | WLL 45-60° ton | Use for hook DIN 15401 no. | Double hook DIN 15402 no. | d mm | e mm | t mm | w mm | Weight kg |
|------------|-----------|---------|-----|----------------|----------------------------|---------------------------|------|------|------|------|-----------|
| 11.0287891 | LXKW 2-8 | 3.55 | 516 | 2,5 | 5 | 6 | 23 | 516 | 340 | 180 | 2.29 |
| 11.0287892 | LXKW 2-10 | 5.6 | 571 | 4 | 6 | 8 | 27 | 571 | 340 | 180 | 4.3 |
| 11.0287893 | LXKW 2-13 | 9.5 | 628 | 6,7 | 8 | 10 | 33 | 628 | 340 | 180 | 7.98 |
| 11.0287894 | LXKW 2-16 | 14 | 690 | 10 | 10 | 12 | 40 | 690 | 340 | 180 | 13.98 |