


## Master Link Assembly Pewag VSAW 1

---

### Product information

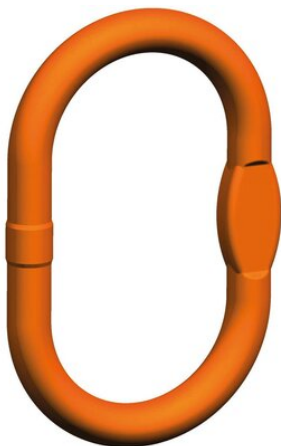

VSAW is designed for assembling of welded chain slings with transition links BW by pewag. For assembling of chain slings with Connex CW.

Extra-large internal ring dimensions that are suitable for single hooks according to DIN 15401 no. 50/100 or for double hooks according to DIN 15402 no. 63/125 are yet another outstanding feature of these products.

... [Read more](#)

---

**Material:** High duty grade 10.

**Marking:** According to standard, CE-marked, Pewag or PW, winner or 10, H16, batch code and type.

**Temperature range:** -40°C up to +380°C.

**Finish:** Orange powder coated.


**Standard:** EN 1677-4

**Safety factor:** 4:1

**Grade:** 10

## Master Link Assembly Pewag VSAW 1

### Blueprint



### Technical data

Part code	Code	WLL ton	EWL	Consisting of	Double hook DIN 15402 no.	Can be used up to single hook acc. to DIN 15401 no.	dmm mm	e mm mm	smm mm	t mm	w mm mm	Weight kg
11.0298019	VSAW 1-16	10	500	SAW 32	63	50	33	500	26	500	250	9.32
11.0298029	VSAW 1-10/13	10	500	SAW 32+BW 20	63	50	33	585	26	500	250	10
11.0298021	VSAW 1-19	16	460	SAW 40	63	50	40	460	32	460	250	13.12
11.0298023	VSAW 1-22	22.4	500	SAW 45	63	50	45	500	-	500	250	17.8
11.0298025	VSAW 1-26	33.6	460	SAW 50	63	50	50	460	43	460	250	20.98
11.0298027	VSAW 1-32	40	460	SAW 56	63	50	56	460	-	460	250	26.68
11.0215475	VSAW 1-32 320	40	800	SAW 60	125	100	60	800	54	800	320	48