


Master Link Assembly Pewag VSAW 2

Product information

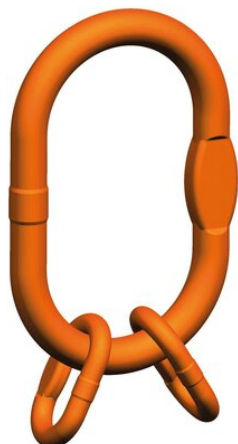

VSAW is designed for assembling of welded chain slings with transition links BW by pewag. For assembling of chain slings with Connex CW.

The flattened section on the rings make them universally adaptable and the extra-large interior dimensions of the rings make them easy to use with single hooks according to DIN 15401 no. 50/100 or double hooks according to DIN 15402 no. 63/125.

... [Read more](#)

Material: High duty grade 10.

Marking: According to standard, CE-marked, Pewag or PW, winner or 10, H16, batch code and type.

Temperature range: -40°C up to +380°C.

Finish: Orange powder coated.


Standard: EN 1677-4

Safety factor: 4:1

Grade: 10

Master Link Assembly Pewag VSAW 2

Blueprint



Technical data

Part code	Code	WLL ton	EWL	Consisting of	Double hook DIN 15402 no.	Can be used up to single hook acc. to DIN 15401 no.	d mm	e mm	t mm	w mm	Weight kg
11.0298031	VSAW 2-10/13/4-10	9.5	585	SAW 32+2 BW 20	63	50	33	585	500	250	10.68
11.0298033	VSAW 2-16/4-13	14	575	SAW 40+2 BW 22	63	50	40	575	460	250	15.44
11.0298035	VSAW 2-19/20/4-16	21.2	640	SAW 45+2 BW 26	63	50	45	640	500	250	21.64
11.0298037	VSAW 2-22/4-19/20	30	610	SAW 50+2 BW 32	63	50	50	610	460	250	27.3
11.0298039	VSAW 2-26/4-22	40	610	SAW 56+2 BW 32	63	50	56	610	460	250	34.92
11.0298041	VSAW 2-26/4-22/320	40	950	SAW 60+2 BW 32	125	100	60	950	800	320	56.24