

## OBKW vertical lifting clamps

---

### Product information




**General:** For lifting and moving of steel beams, profiles and structures. Because of the safety mechanism, the OBKW clamp is locked in closed as well as in open position. The clamp is suitable to lift steel beams on the flange as well as on the upper ends of the beam.

Other jaw-openings and Working Load Limits are available upon request [... Read more](#)

---

## OBKW vertical lifting clamps

### Blueprint

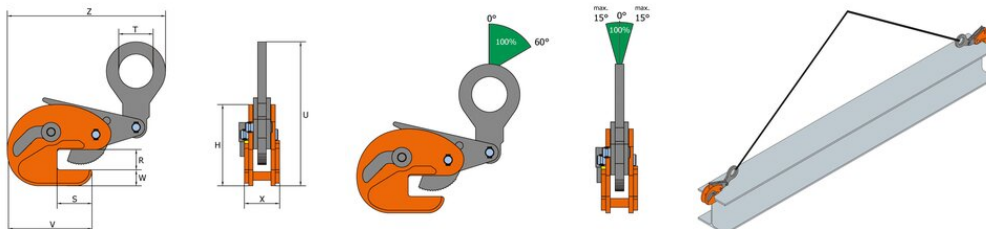

### Technical data

Part code	Code	WLL ton	Jaw width mm	H, mm	S mm	T mm	U mm mm	V mm mm	W mm mm	X mm mm	Y mm mm	Z mm mm	Weight kg
16.01OBKW2t	OBKW 2 t	2	3-20	154	64	64	310	192	30	65	15	285	6.8