

HXW/HSXW horizontal lifting clamps

Product information




General: For horizontal lifting and moving of steel plates. Clamp with compact shape and relative light unit weight. HXW/HSXW pewag winner lifting clamps **must always be used in pairs (or multiples thereof)**. Lifting capacity and jaw opening are clearly engraved in the body. The Working Load Limits indicated are per pair of lifting clamps. The HSXW clamps have a larger jaw opening.

... [Read more](#)

Note: The given WLL is valid per pair.

HXW/HSXW horizontal lifting clamps

Blueprint

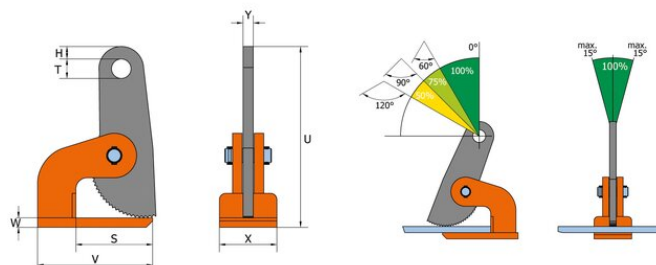

Technical data

Part code	Code	WLL ton	Jaw width mm	H, mm	S mm	T mm	U mm mm	V mm mm	Wmm mm	X mm mm	Ymm mm	Weight kg
16.01HXW1t	HXW 1 t	1	0-35	11.5	99	25	188	140	10	65	15	2.6
16.01HXW2t	HXW 2 t	2	0-60	19.5	118	30.5	287	180	15	90	16	7
16.01HXW3t	HXW 3 t	3	0-60	19.5	118	30.5	291	180	20	90	16	8
16.01HXW4t	HXW 4 t	4	0-60	19.5	145	30.5	304	220	25	105	20	13
16.01HXW6t	HXW 6 t	6	0-60	19.5	145	30.5	307	220	25	110	20	14
16.01HXW8t	HXW 8 t	8	0-60	19.5	135	30.5	336	225	35	120	30	19
16.01HXW10t	HXW 10 t	10	0-60	19.5	135	30.5	336	225	35	120	30	19
16.01HXW12t	HXW 12 t	12	0-60	19.5	135	30.5	336	225	35	120	30	19
16.01HXW15t	HXW 15 t	15	0-60	21.5	147	43	344	262	35	160	35	30
16.01HXW25t	HXW 25 t	25	0-60	21.5	147	43	349	262	40	175	35	33