

## HSKW horizontal lifting clamps

---

### Product information



**General:** For lifting, handling and moving of banded/secured stacks and single steel plates. The HSKW horizontal lifting clamps **must always be used in pairs**. The use of two pairs by means of a load spreader bar is also possible.


Capacity 1,5tons per pair up to 9 tons per pair. Opening 3 - 180mm, 3 - 300mm and 3 - 420mm.

... [Read more](#)

---

## HSKW horizontal lifting clamps

### Blueprint

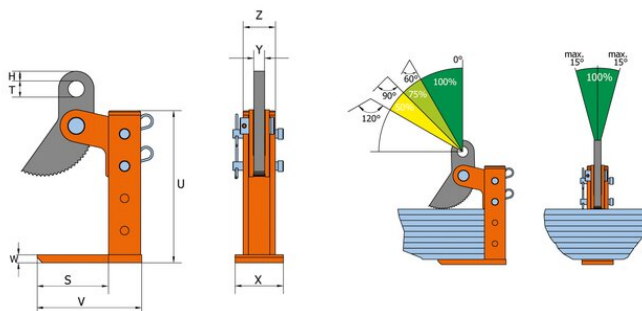

### Technical data

Part code	Code	WLL ton	Jaw width mm	load capacity kg/pair	H mm	S mm	T mm	U mm	V mm	W mm	X mm	Y mm	Z mm	Weight kg
16.01HSKW/1801.5t	HSKW/180 1.5 t	1.5	3-180	1,500	18	135	30.5	289	201	15	90	20	60	9.5
16.01HSKW/3001.5t	HSKW/300 1.5 t	1.5	3-300	1,500	18	135	30.5	409	201	15	90	20	60	11
16.01HSKW/1803t	HSKW/180 3 t	3	3-180	3,000	18	165	30.5	296	241	20	105	20	69	13
16.01HSKW/3003t	HSKW/300 3 t	3	3-300	3,000	18	165	30.5	416	241	20	105	20	69	15
16.01HSKW/1804.5t	HSKW/180 4.5 t	4.5	3-180	4,500	18	165	30.5	296	241	20	105	20	69	13
16.01HSKW/4204.5t	HSKW/420 4.5 t	4.5	3-420	4,500	18	165	30.5	536	241	20	105	20	69	17
16.01HSKW/1806t	HSKW/180 6 t	6	3-180	6,000	18	160	30.5	304	256	25	120	20	75	18
16.01HSKW/4206t	HSKW/420 6 t	6	3-420	6,000	18	160	30.5	544	256	25	120	20	75	24
16.01HSKW/1809t	HSKW/180 9 t	9	3-180	9,000	18	160	30.5	304	256	25	120	20	75	18
16.01HSKW/4209t	HSKW/420 9 t	9	3-420	9,000	18	160	30.5	544	256	25	120	20	75	24