

BLCW special grab

Product information




General:

For vertical lifting and moving of various materials as steel, wood, plastic, concrete, marble etc. which have parallel sides. The clamp is locked in the open position. To perform lifting, the operator must activate the handle and hold it up while the force on the lifting eye is going upwards. When laying down the load, the clamp automatically unlocks itself to open.

The pads are covered with special plastic to avoid damage of contact surfaces
... [Read more](#)

BLCW special grab

Blueprint

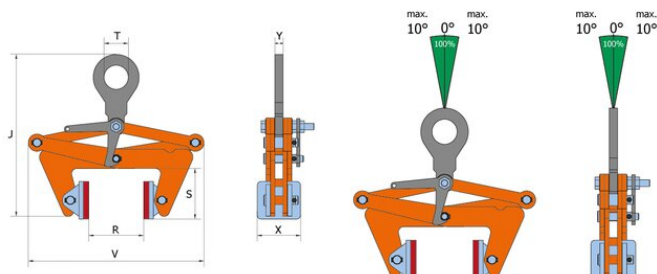

Technical data

Part code	Code	WLL ton	Beam width	S mm	T mm	U mm mm	V mm mm	X mm mm	Ymm mm	Weight kg
16.01BLCW 0.5 t	BLCW 0.5 t	0.5	30-110	95	45	305-460	270-325	80 (*70)	15	7
16.01BLCW 1 t	BLCW 1 t	1	100-230	120	45	380-655	425-530	80 (*70)	15	12.3
16.01BLCW 2 t	BLCW 2 t	2	220-360	140	45	410-735	580-675	80 (*70)	15	18
16.01BLCW 3 t	BLCW 3 t	3	350-500	178	64	530-900	725-835	100 (*90)	16	33