

DIN 3090 kabelkous

Productinformatie



Algemeen: Versterkte kabelkous DIN 3090.

Norm: Volgens DIN 3090

[... Read more](#)


Materiaal: Zacht staal.

Markering: Volgens norm, CE

Norm: DIN 3090

DIN 3090 kabelkous

Maattekening

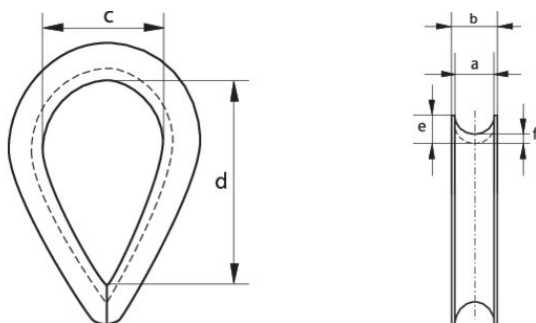

DIN 3090 kabelkous

Technische gegevens

| KabelØ Bereik mm | a mm | b mm | c mm | d mm | e mm | f mm | Gewicht (kg) |
|------------------------|------|------|------|------|------|------|-----------------|
| 4 | 5 | 9 | 10 | 20 | 5,1 | 2,1 | 0,014 |
| 6 | 7 | 12 | 15 | 30 | 7,1 | 2,6 | 0,03 |
| 8 | 9 | 13 | 20 | 40 | 11 | 4 | 0,071 |
| 10 | 11 | 16 | 25 | 50 | 14 | 5 | 0,17 |
| 12 | 13 | 19 | 30 | 60 | 16 | 6 | 0,24 |
| 14 | 16 | 22 | 35 | 70 | 17 | 7 | 0,36 |
| 16 | 18 | 25 | 40 | 80 | 19 | 8 | 0,5 |
| 18 | 20 | 27 | 45 | 90 | 21 | 9 | 0,62 |
| 20 | 22 | 32 | 50 | 100 | 23 | 10 | 0,9 |
| 22 | 24 | 33 | 55 | 110 | 24 | 10 | 1 |
| 24 | 26 | 37 | 60 | 120 | 27 | 11 | 1,3 |
| 26 | 29 | 46 | 65 | 130 | 30 | 12 | 2,2 |
| 28 | 31 | 50 | 70 | 140 | 33 | 12 | 2,4 |
| 32 | 35 | 55 | 80 | 160 | 38 | 14 | 2,7 |
| 36 | 40 | 60 | 90 | 180 | 42 | 16 | 4,3 |
| 40 | 44 | 65 | 100 | 200 | 46 | 18 | 5,7 |
| 44 | 48 | 70 | 110 | 220 | 53 | 20 | 8,5 |
| 48 | 53 | 75 | 120 | 240 | 58 | 22 | 11,2 |
| 52 | 57 | 80 | 130 | 260 | 64 | 25 | 15,3 |
| 56 | 62 | 85 | 140 | 280 | 67 | 25 | 21,5 |
| 60 | 66 | 90 | 150 | 300 | 70 | 25 | 23 |
| 64 | 70 | 95 | 160 | 320 | 78 | 30 | 35 |
| 68 | 75 | 100 | 170 | 340 | 81 | 30 | 37 |
| 72 | 79 | 105 | 180 | 360 | 84 | 30 | 41 |
| 76 | 84 | 115 | 190 | 380 | 87 | 30 | 46 |
| 80 | 88 | 120 | 200 | 400 | 90 | 30 | 54 |