MENNENS | Lifting Solutions Group
Axel Johnson International

Yalelift IT hand chain hoist with trolley

Product information



General:
Capacity 500 - 20000 kg
The combination of the Yalelift 360 with a low headroom manual trolley provides even more flexibility in the ap-plication of the Yalelift 360.

· The proven and almost stepless adjustment system allows quick and easy assembly of the trolley.
· Trolleys up to 5 t are offered for two beam ranges. Range A for a flange width up to 180 mm is standard and covers approx. 80 % of all applications. Conversion to range B for beam width up to 300 mm can be easily accomplished.
· The trolley wheels are designed for a max. beam profile incline of 14 % (DIN 1025 - part 1), excellent rolling features are guaranteed by prelubricated, encapsulated ball bearings.
· Anti-drop and anti-tilt devices as standard.

Options:
· Adjustable overload protection device.
· Chain container
· Rubber buffers
· Corrosion resistant version
· Beam locking device to secure the unloaded trolley in a fixed position on the beam (park position e.g. on ships). Available up to a capacity of 5000 kg.
· Explosion proof version

... *Read more*

Features: · All units of this series up to a capacity of 3000 kg are provided with single chain fall and the min. headroom (Dim. A) has been further reduced. Ideal for applica-tions with low ceilings
Note: Yale hoists and trolleys are not designed for passenger elevation applications and must not be used for this purpose.


Mennens Belgium
sales@mennensbelgium.be
+32 (0)3 253 23 23

© November 2026 - All Rights Reserved

MENNENS | Lifting Solutions Group
Axel Johnson International

Yalelift IT hand chain hoist with trolley

Blueprint

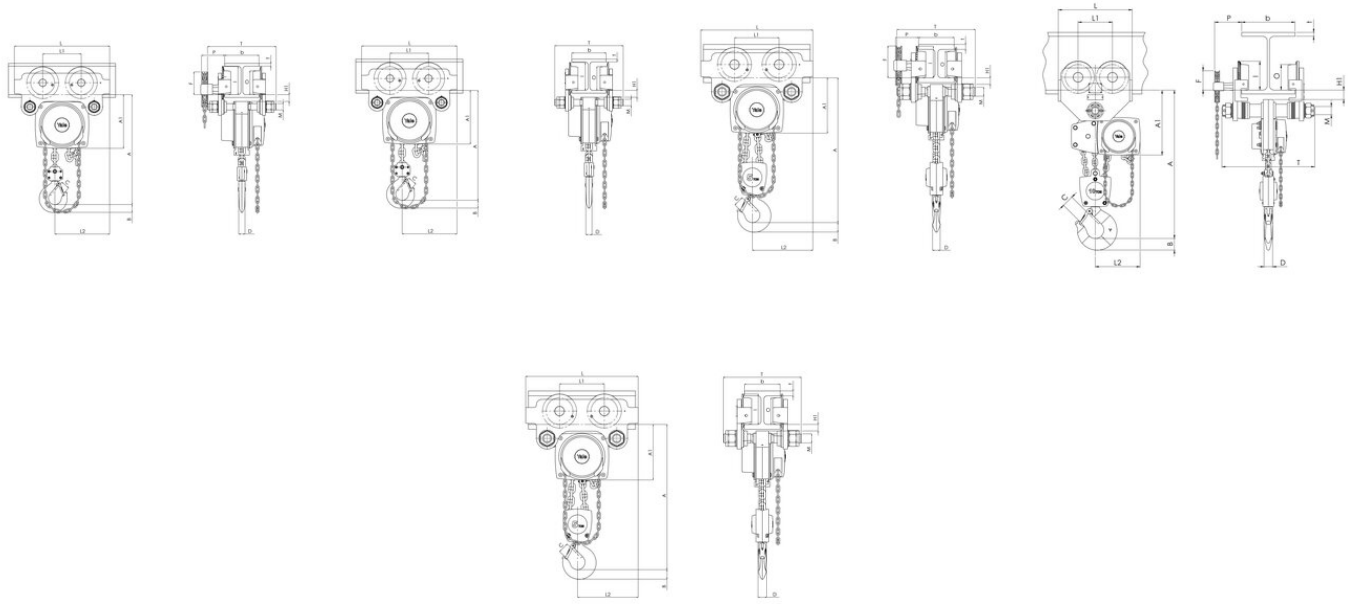

Technical data

Part code	WLL ton	Size	Lifting height m	Number of falls	Beam width	Model	Minimum radius mm
500500050300170	0.5	A	3	1	50-180	YLIT 500	900
500500050300174	0.5	B	3	1	180-300	YLIT 500	900
500500100300170	1	A	3	1	50-180	YLIT 1000	900
500500100300174	1	B	3	1	180-300	YLIT 1000	900
500500200300170	2	A	3	1	58-180	YLIT 2000	1,150
500500200300174	2	B	3	1	180-300	YLIT 2000	1,150
500500300300170	3	A	3	1	74-180	YLIT 3000	1,500
500500300300174	3	B	3	1	180-300	YLIT 3000	1,400
500500500300170	5	A	3	2	98-180	YLIT 5000	2,000
500500500300174	5	B	3	2	180-300	YLIT 5000	1,800
500501000300170	10	B	3	3	125-310	YLIT 10000	1,800
500502000300170	20	B	3	6	180-310	YLIT 20000 1	9,500

Mennens Belgium
sales@mennensbelgium.be
+32 (0)3 253 23 23

© November 2026 - All Rights Reserved