


Master Link assembly Pewag VMWP

Product information

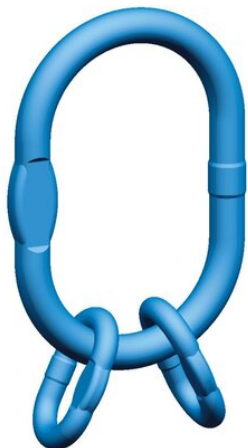

Enlarged master link assembly for creating II- III- and IV-leg chain slings for all chain dimensions.

... [Read more](#)

Material: Alloy steel.

Marking: According to standard, CE-marked, Pewag or PW, winner pro or 12, H16, batch code and type.

Temperature range: -60°C up to +300°C.

Finish: Light blue powdercoated.

Standard: EN 1677-4


Warning: Not to be heat-treated.

Safety factor: 4:1

Grade: 12

Master Link assembly Pewag VMWP

Blueprint



Technical data

Part code	Code	WLL ton	EWL	d mm	d1 mm	e mm	s mm	t mm	t1 mm mm	w mm mm	w1mm mm	Weight kg
11.0387994	VMWP 2- 7/8	4.25	214	19	13	214	14	160	54	95	25	1.47
11.0387996	VMWP 2-10/4-7/8	8.8	260	27	17	260	20	190	70	110	34	3.45
11.0387998	VMWP 2-13/4-10	12.3	315	33	20	315	26	230	85	130	40	6.28
11.0387992	VMWP 4-13	21.2	415	38	27	415	29	275	140	150	65	11.5
11.0332132	VMWP 4-16	26.5	425	38	33	425	29	275	150	150	70	13.8