


Bow Shackles with Safety Bolt Yellow Pin G-3163

Product information

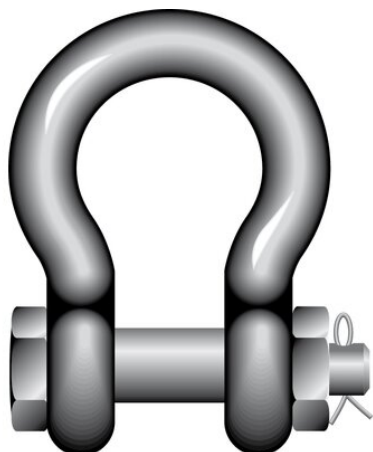

Bow shackles with safety bolt.

Certification on request: 2.1, 2.2

Standard: generally to US Fed. Spec. RR-C-271

[... Read more](#)

Material: bow and pin high tensile steel

Marking: CE-marked

Finish: hot dipped galvanized


Note: import quality

Safety factor: 6:1

Grade: 6

Bow Shackles with Safety Bolt Yellow Pin G-3163

Blueprint



Technical data

| Part code | Diameter mm | WLL ton | Size | a mm | b mm | c mm | d mm | e mm | f mm | Weight kg |
|---------------|-------------|---------|------|------|------|------|------|------|------|-----------|
| - | 30 | 2 | 33 | 13 | 16 | 30 | 20 | 48 | 33 | 0.36 |
| 11.31LRYHMB16 | 38 | 3.25 | 43 | 16 | 19 | 38 | 27 | 60 | 43 | 0.7 |
| - | 46 | 4.75 | 50 | 19 | 22 | 46 | 32 | 71 | 50 | 1.1 |
| 11.31LRYHMB22 | 53 | 6.5 | 58 | 22 | 25 | 53 | 36 | 84 | 58 | 1.61 |
| 11.313312210 | 61 | 8.5 | 68 | 25 | 28 | 61 | 43 | 95 | 68 | 2.42 |
| - | 68 | 9.5 | 74 | 28 | 32 | 68 | 46 | 108 | 74 | 3.35 |
| - | 76 | 12 | 82 | 32 | 35 | 76 | 51 | 119 | 82 | 5.32 |
| - | 84 | 13.5 | 92 | 35 | 38 | 84 | 57 | 133 | 92 | 7.19 |
| - | 92 | 17 | 98 | 38 | 42 | 92 | 60 | 146 | 98 | 9.44 |
| - | 106 | 25 | 127 | 45 | 50 | 106 | 73 | 177 | 127 | 13.8 |