


## Stainless Steel Wire Rope 7x19

---

### Product information

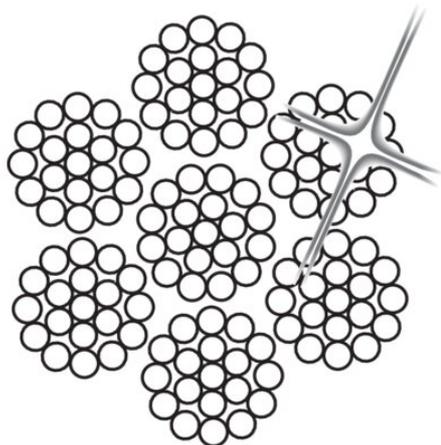

SZ zS SS\*

**Design:** Cross lay right-handed.

[... Read more](#)

---

**Rope construction:** 7x19 stainless steel wire rope.

**Material:** AISI 316/1570 N/mm<sup>2</sup>

## Stainless Steel Wire Rope 7x19

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
-	3	1,570	Stainless	sZ	4.66	-	No-Lube	3.42
-	3	1,570	Stainless	zS	4.66	-	No-Lube	3.42
-	4	1,570	Stainless	sZ	8.34	-	No-Lube	6.09
-	4	1,570	Stainless	zS	8.34	-	No-Lube	6.09
-	5	1,570	Stainless	sZ	13	-	No-Lube	9.52
-	5	1,570	Stainless	zS	13	-	No-Lube	9.52
-	6	1,570	Stainless	sZ	18.7	-	No-Lube	13.8
-	6	1,570	Stainless	zS	18.7	-	No-Lube	13.8
-	8	1,570	Stainless	sZ	33.3	-	No-Lube	24.3
-	8	1,570	Stainless	zS	33.3	-	No-Lube	24.3
-	10	1,570	Stainless	sZ	52.1	-	No-Lube	38.1
-	10	1,570	Stainless	zS	52.1	-	No-Lube	38.1
-	12	1,570	Stainless	sZ	75	-	No-Lube	54.8
-	12	1,570	Stainless	zS	75	-	No-Lube	54.8
-	14	1,570	Stainless	sZ	102	-	No-Lube	76.4
-	14	1,570	Stainless	zS	102	-	No-Lube	76.4
-	16	1,570	Stainless	sZ	133	-	No-Lube	97
-	16	1,570	Stainless	zS	133	-	No-Lube	97