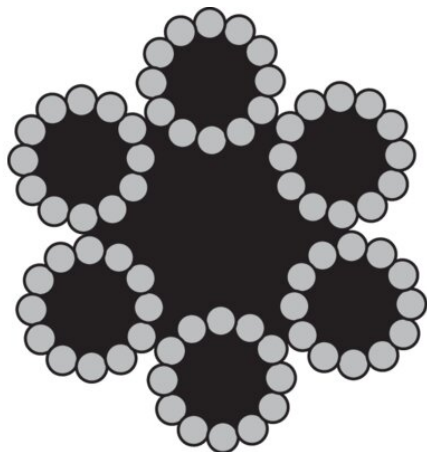


Steel Wire Rope 6x12-7FC

Product information

SZ G

[... Read more](#)

Rope construction: 6x12-7FC

Fill factor: 0.30

Steel Wire Rope 6x12-7FC

Technical data

| Part code | Rope diameter mm | Tensile strength N/mm ² | Finish | Rope lay | Min. breaking force kN | Steel area mm ² | Lubrication | Weight kg/100m |
|---------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|-------------|-------------------|
| 01.G10072030E | 3 | 1,770 | Galvanized | sZ | 3.33 | 2.09 | Dry | 2.1 |
| 01.G10072040E | 4 | 1,770 | Galvanized | sZ | 5.92 | 3.71 | Dry | 3.7 |
| 01.G10072050E | 5 | 1,770 | Galvanized | sZ | 9.25 | 5.8 | Dry | 5.8 |
| 01.G10072060E | 6 | 1,770 | Galvanized | sZ | 13.3 | 8.35 | Dry | 8.3 |
| 01.G10072070E | 7 | 1,770 | Galvanized | sZ | 18.1 | 11.4 | Dry | 11 |
| 01.G10072080E | 8 | 1,770 | Galvanized | sZ | 23.7 | 14.8 | Dry | 15 |
| 01.G10072100E | 10 | 1,770 | Galvanized | sZ | 37 | 23.2 | Dry | 23 |
| 01.G10072120E | 12 | 1,770 | Galvanized | sZ | 53.3 | 33.4 | Dry | 33 |